


BOAT ORGANIZATION

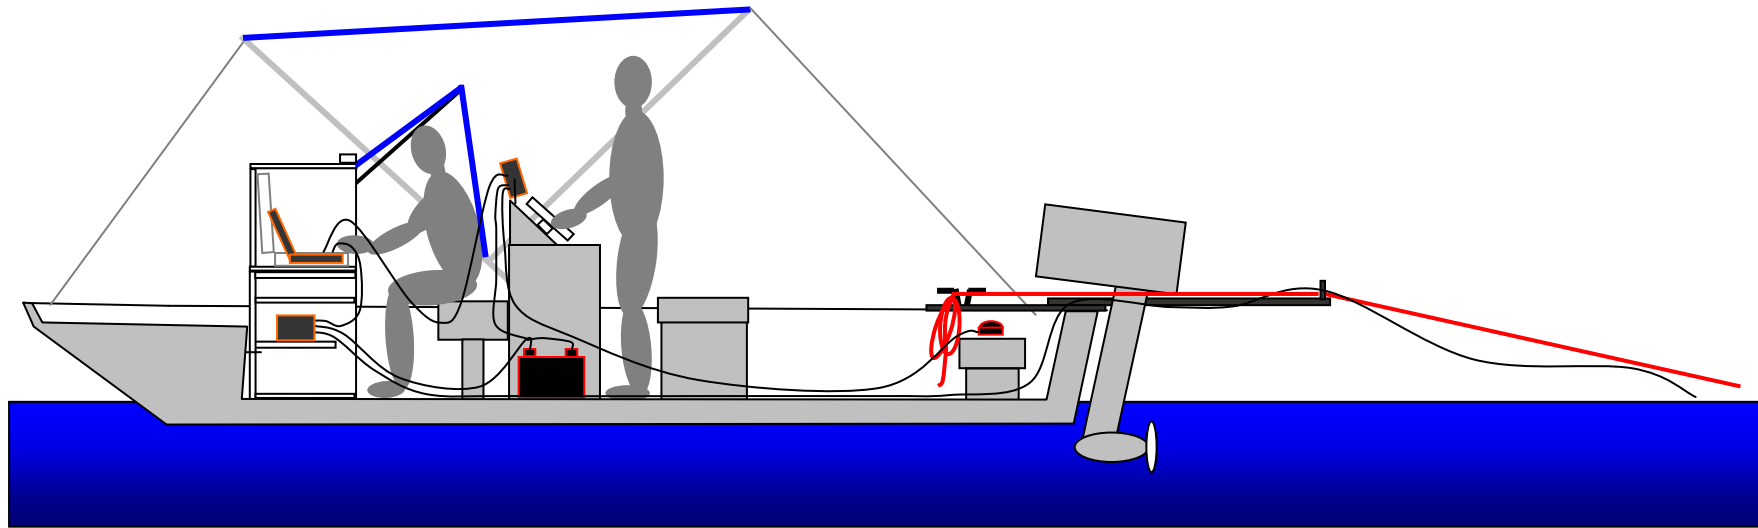

PC and PPM Sun shade GPS Battery

GPS Antenna Propeller protection bar


PPM and towing cables

Fixing tape between towing cable and comm cable, every meters


Cable support buoys every 5m

Cable length 30m

Torpedo Buoy (depth setting)

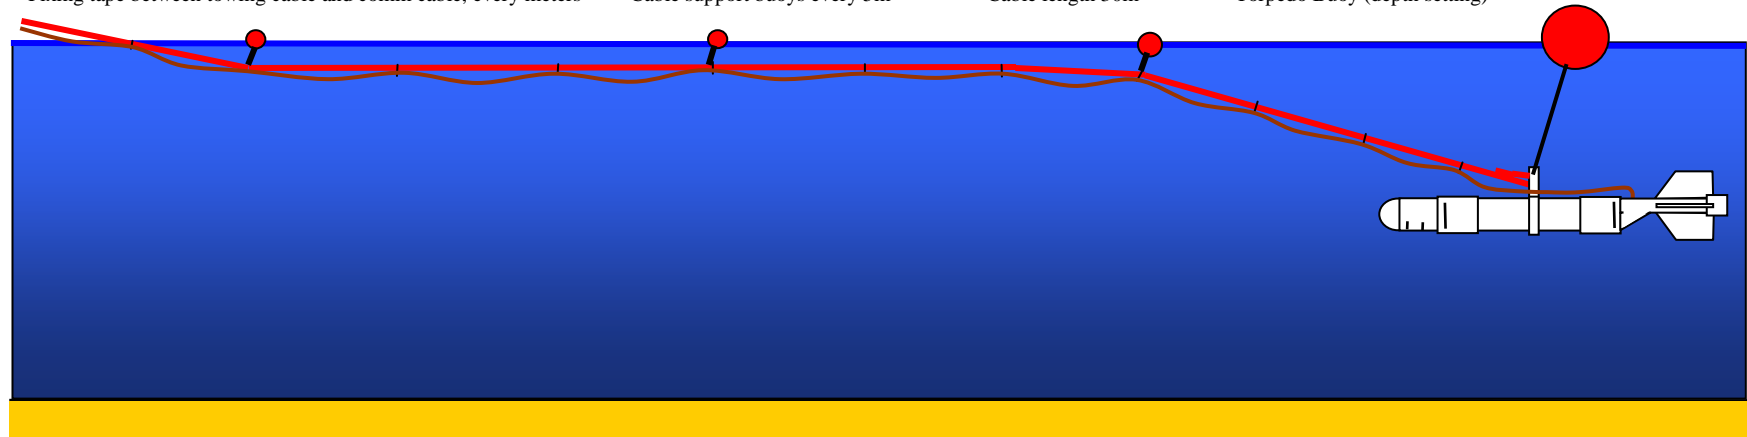


MAGNETOMETER TORPEDO

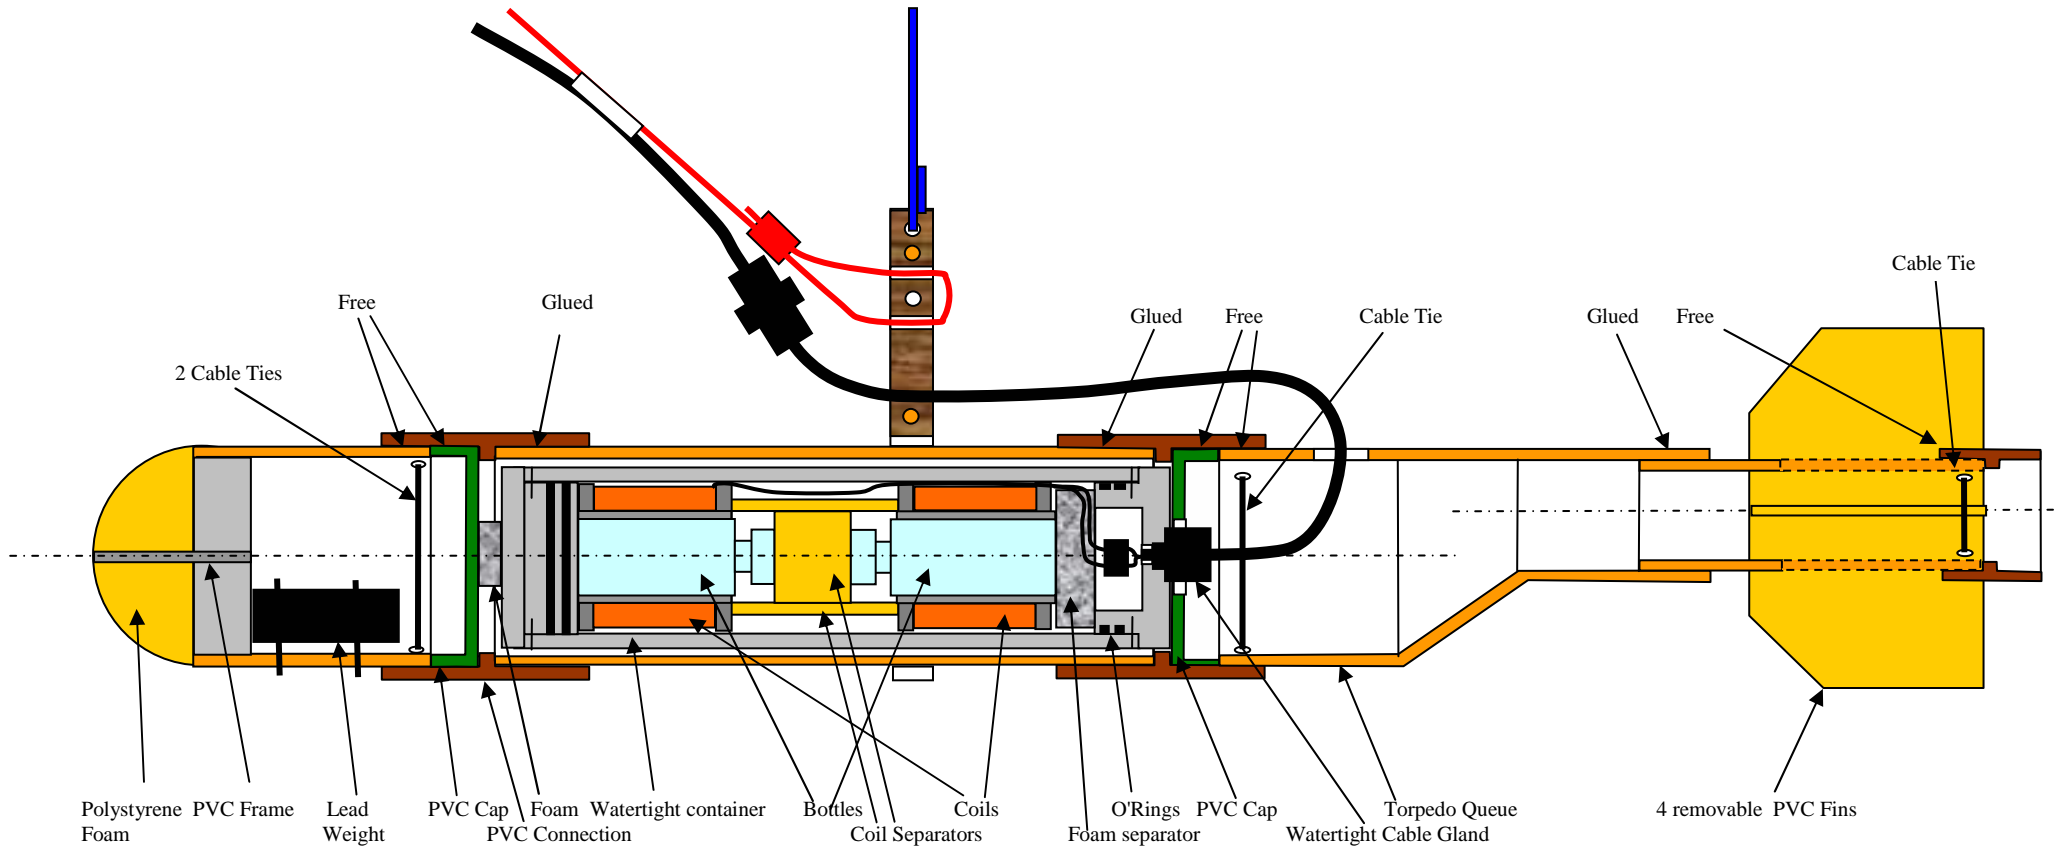

TOWING RING

Propeller avoidance bar (Stainless steel)

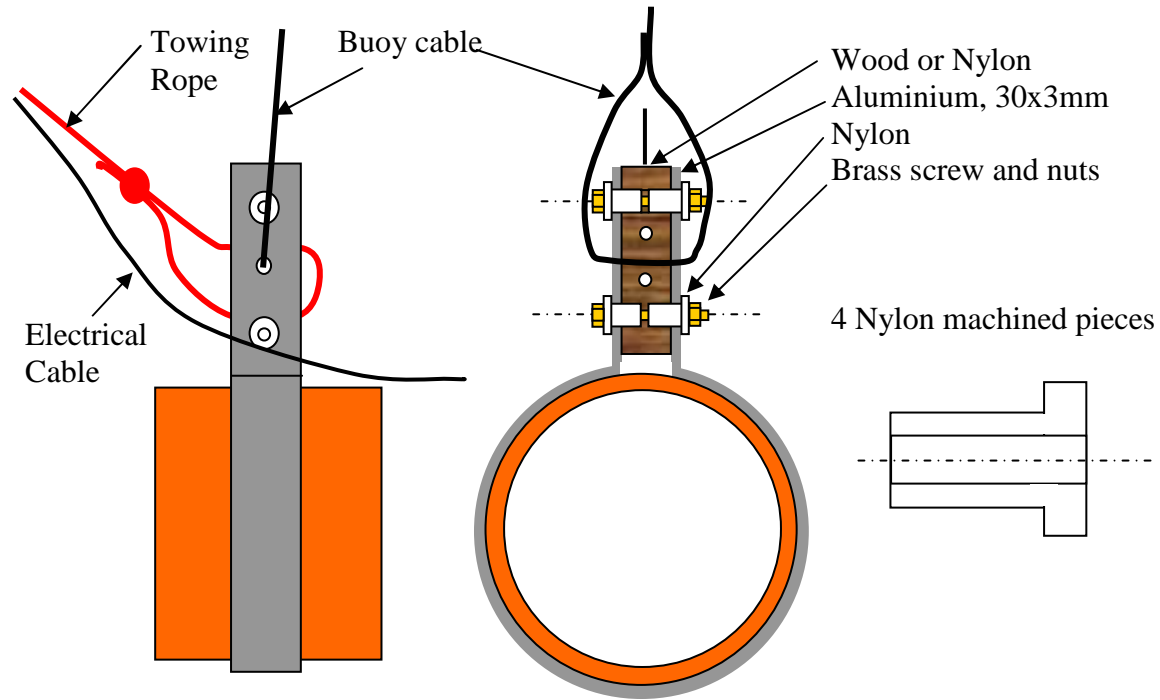

Metallic ring must not be closed, screws and nuts must be insulated.
Don't use stainless iron for the screws, use brass
Ring must be put in the gravity point of the torpedo (torpedo in an horizontal position when the torpedo is held by the ring).

